

# JRC-IV-7 -SIP-701-B S SERIES-7" Indoor Monitor


## Key Characteristics

### Basic Function

- 7" capacitive touch screen
- Support custom wallpaper and screensaver
- Multi - indoor monitor in one apartment
- Voice message, blacklist, whitelist feature
- RS485 for smart home setting
- 7 defense zone alarm input
- RTSP for IP camera setting
- Easy configuration with APP by scanning QR Code



## Typical Topology

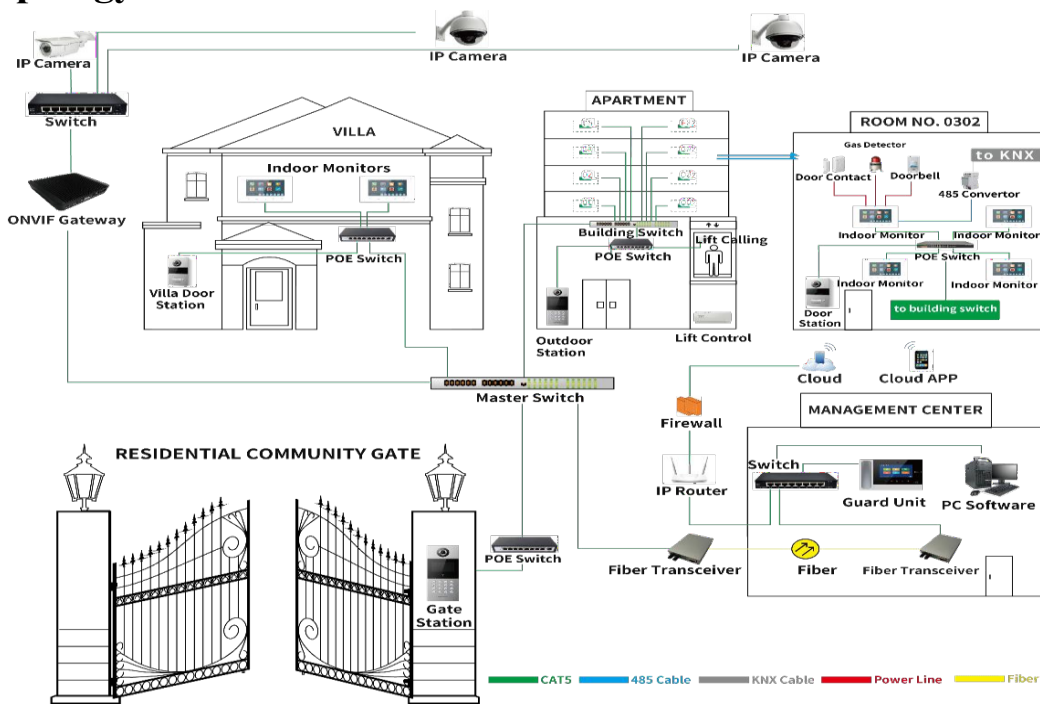

## Specifications

<b>Model</b>	<b>Model Number</b>	<b>JRC-IV-7 -SIP-701-B</b>
<b>System Parameters</b>	<b>Processor</b>	High-Performance Embedded SOC Processor
	<b>Operation system</b>	Embedded Linux Operation System
<b>Display Parameters</b>	<b>Display screen</b>	7-inch Colored TFT LCD
	<b>Display resolution</b>	1024 × 600
	<b>Operation method</b>	Capacitive Touch Screen
	<b>Operation interface</b>	Delicate Flattened UI Operation Interface
<b>Audio Parameters</b>	<b>Audio input</b>	Built-in Omnidirectional Microphone
	<b>Audio output</b>	Built-in Loudspeaker
	<b>Audio compression standard</b>	G.711 A
	<b>Audio <u>sample rate</u></b>	16K 16 Bit
	<b>Audio quality</b>	Noise Elimination and Echo Cancellation
<b>Network Parameters</b>	<b>Ethernet</b>	10/100 Mbps Self-Adaptive Ethernet
	<b>Network protocol</b>	TCP/IP, UDP, <a href="#">SIP</a> , <a href="#">HTTP</a> , <a href="#">HTTPS</a> , <a href="#">FTP</a> , <a href="#">RTSP</a> , <a href="#">RTP</a>
<b>Alarm Parameters</b>	<b>Alarm input</b>	7-channel Defense Zone Alarm Inputs
<b>Device Interfaces</b>	<b>Network interface</b>	1 RJ-45 10/100 Mbps Self-Adaptive Ethernet Interface
	<b>RS-485</b>	1 RS-485 Half-Duplex Port
	<b>I/O output</b>	Unlock button
<b>General</b>	<b>Memory</b>	<a href="#">50</a> Photoes
	<b>Power supply</b>	48V Power Over Ethernet
		DC 24V
	<b>Power consumption</b>	< <a href="#">7W</a> <a href="#">24V 300mA</a>
	<b>Working temperature</b>	-10° C to + 45° C
	<b>Working humidity</b>	10% to 90%
	<b>Dimensions (L × W × H)</b>	182 mm × 119 mm × 15 mm
<b>Certification</b>	CE, ROHS	



*gic*

# Appearance and Interfaces

